


**The XD-Indexer offers three approaches for I/O connectivity:**

- Drive Mounted Connector
- Panel Mounted I/O Cable Assembly
- Custom Panel Connection Kit

Each is easy to implement, operate and maintain.

**Drive Mounted Connector**

A single piece D-Sub to terminal block mounts directly to the top of the Indexer drive. This provides terminal block access to the 37 I/O points.

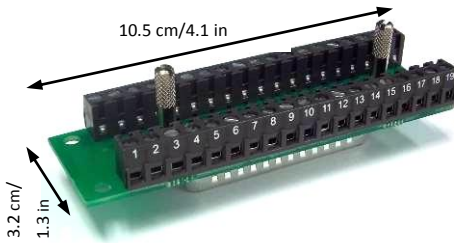

**Ordering Number:**  
CON-1110  
I/O connector, Indexer mounted terminal block

**Panel Mounted I/O Cable Assembly**

A fully tested cable assembly takes all the I/O connections to the panel.

Assembly includes:

- Terminal block that mounts on a 35mm standard DIN rail, with screw style terminals for field wiring
- One of two cables:

**3A** - High current output enabled (up to 50 ft.)

**3B** - Standard current capability (6 ft.)



**Ordering Number:**  
CBA-XD-IO-3A-37 / (length in ft.)  
CBA-XD-IO-3B-37 / 6  
Cable assembly, I/O with panel mounted terminal block


**Custom Panel Connection Kit**

A cable is customized to connect a subset of I/O connections to the panel. This is for applications that do not require the full complement of 37 I/O points.

Kit includes:

- Solder cup D-Sub that connects to the J4 I/O connector on the Indexer. (includes a shell)
- Specified number of DIN rail mounted terminals.
- Two terminal end blocks

The single terminals are wire-to-wire, spring contact connection devices.

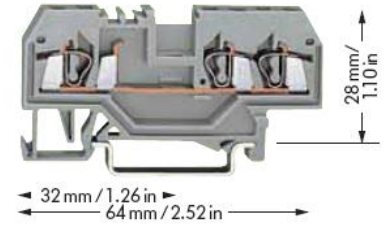

**Ordering Number:**  
CBK-XD-IO-1 (1-37)  
I/O Kit, D sub connector with panel mount terminal block, no wire

**Cable Specifications**

	<b>Current Rating</b>	<b>Length</b>
<b>High current (3A)</b>	1 A	up to 50 ft.
<b>Standard (3B)</b>	150 mA*	6 ft.

\*Does not support full current capabilities of the Indexer's digital outputs.

Additional options are available. Consult ORMEC sales at (585) 385-3520 or email sales@ormec.com